




General Straightener Specifications – *All PWS Series*

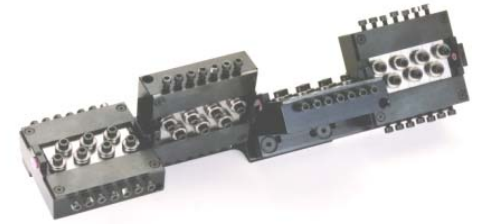

Series	No Rolls per Plane	No of Planes	Bearing Shapes Available	Quick Release	Torque Wrench Included	2 to 4 Plane Conversion	Bearing Speed Rating	Bearing Material	Shielded or Sealed	Bearing ID / OD Width	4 Plane Length & Weight
#00 .006/.012	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	3,478 ft/min	52100 Stl	Shielded	.0937" ID .188" OD .094" W	7 ¼" 2 Lbs
#0 .010/.025	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	4,688 ft/min	52100 Stl	Shielded	.120" ID .280" OD	7 ½" 1½ Lbs
#01 .015/.035	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	3,893 ft/min	52100 Stl	Shielded	.125" ID .375" OD .156" W	10 3/8" 4¾ Lbs
#02 .030/.065	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	3,744 ft/min	52100 Stl	Shielded	.1875" ID .500" OD .196" W	13 7/8" 7½ Lbs
#03 .060/.110	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	3,956 ft/min	52100 Stl	Shielded	.250" ID .750" OD .281" W	22 7/8" 28 Lbs
#04QR .100/.187	11	1,2,3,4	"V" – Flat Radius Shaped	Yes	No	Yes	1,179 ft/min	52100 Stl	Shielded	.625" ID 1.375" OD .438" W	43½" 75 Lbs
#04 Unibody	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	3,702 ft/min	52100 Stl	Shielded	.472" ID 1.260" OD	N/A
#05 QR .150/.250	11	1,2,3,4	"V" – Flat Radius Shaped	Yes	No	Yes	1,489 ft/min	52100 Stl	Shielded	.625" ID 1.750" OD .500" W	54 ¼" 124 Lbs
#05 Unibody	7	1,2,3,4	"V" – Flat Radius Shaped	No	Yes	Yes	3,632 ft/min	52100 Stl	Shielded	.787" ID 1.850" OD	N/A
#06 .200/.350	7	1,2,3,4	"V" – Flat Radius Shaped	Yes	No	N/A	3,976 ft/min	52100 Stl	Shielded	.7874" ID 2.265" OD	N/A